





BASIC PERGOLA - ASSEMBLY INSTRUCTION - (6 Pages)

Because the Basic Pergola weights 107 lbs in total, it is shipped to you on the same day in 3 separate packages marked X, Y and Z. And there are 3 tracking numbers. Please make sure you have received these 3 packages. If one is missing. Please call our customer service number below, during business hours - so we can help you get all the parts complete.

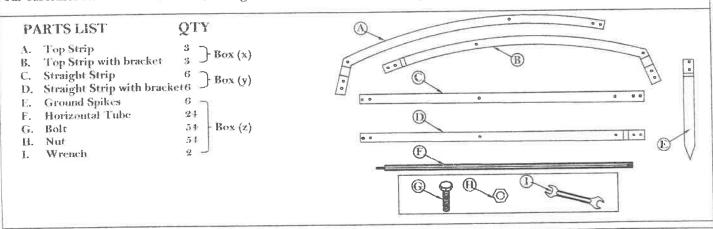

STEP - 1: Take out all parts from cartons X Y Z and count all as per list shown above.

- (A) Take top curved strip A and B and join together as shown in figure.
- (B) Add Straight strip C and join together as shown in figure.
- (C) Add Straight strip with bracket D and join together as shown in figure.
- (D) Add Ground spikes with bracket E and join together as shown in figure.

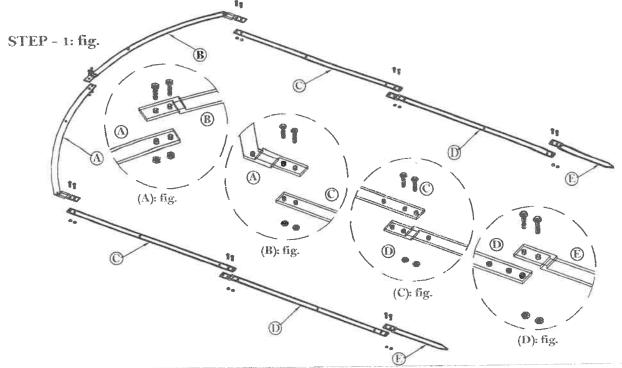

· Work on level hard surface. after assembly several people can carry pergola to final site It is good to have two people for assembly it weight - 107 lbs.

Contact Us Call Toli Free (24 Hours a day)

1-800-733-4146

Customer Service (Monday-Friday, 9am-5pm EST)

1-800-733-4129


E-mail: kinsco@kinsmangarden.com





STEP - 2: Put the one Arch side section on ground and put bolts through underside.


Rotate female thread of horizontals on the bolts and tighten bolts with wrenches.

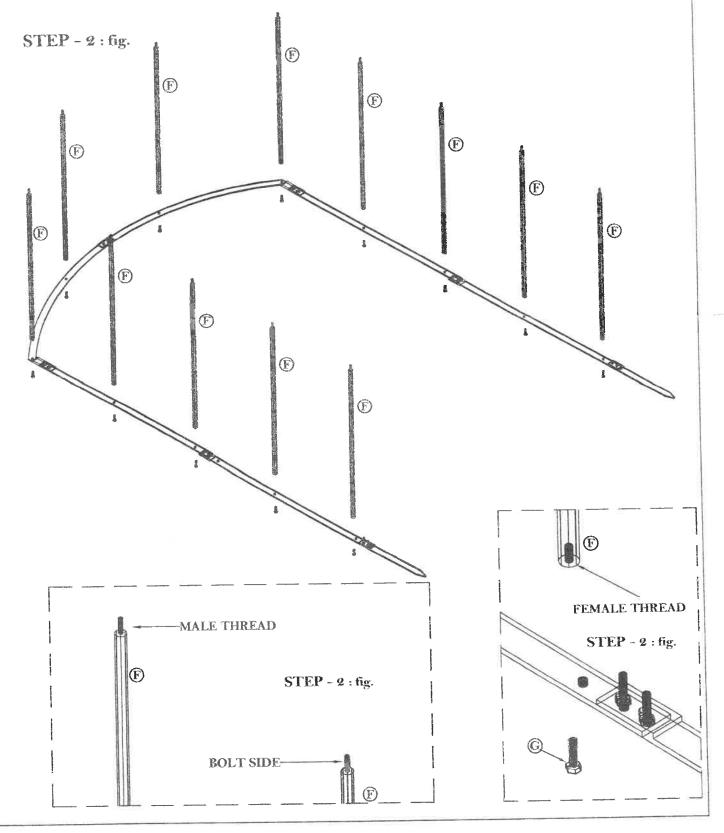






STEP - 3: Take one more Arch assembly frame and put it onto the horizontal as shown in figure.

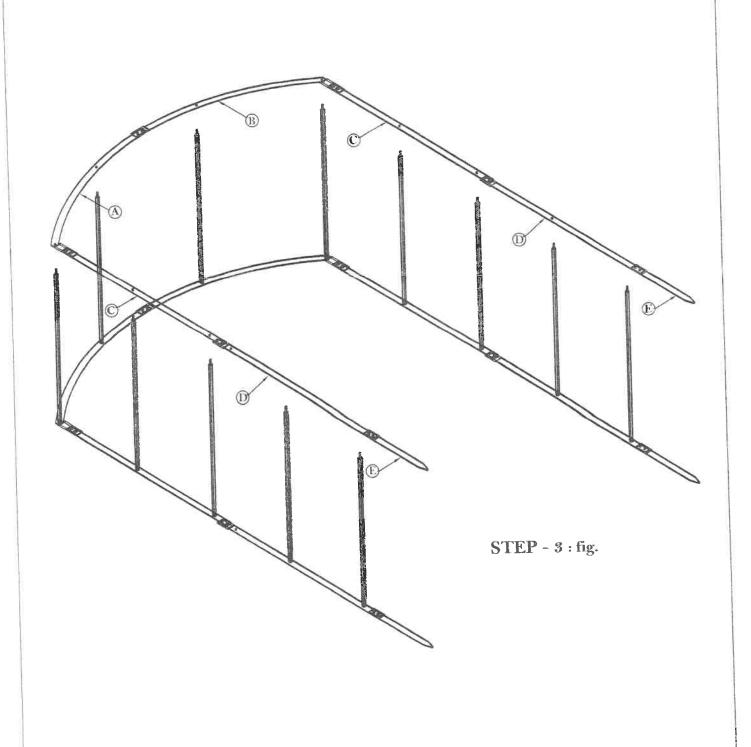



STEP - 4: In the same way take 12 horizontal and tighten them onto the bolts of Assembled Arch as shown in figure.

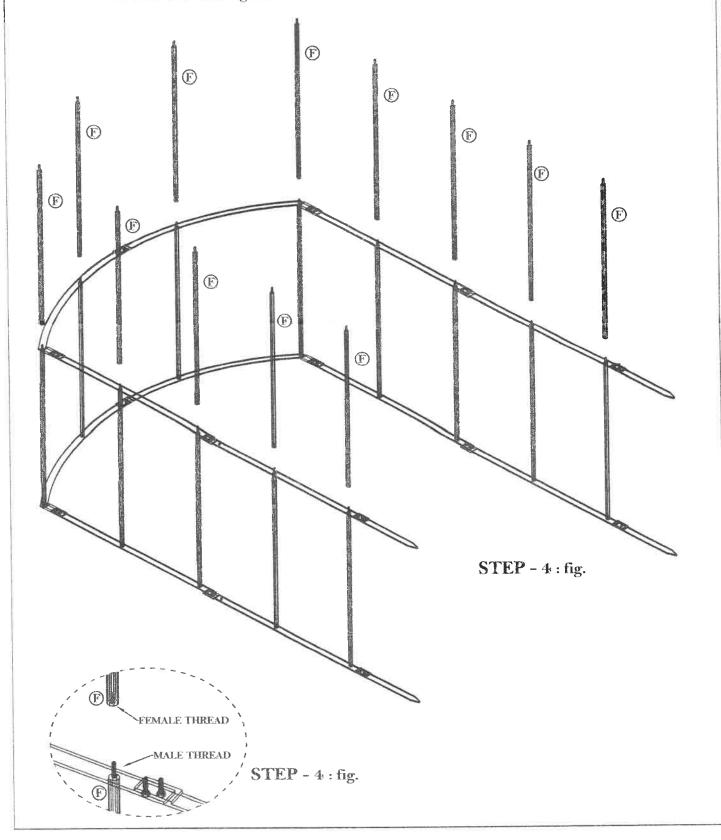






STEP - 5:

Take one more Arch side section and put it into the assembly as shown below.


Take 12 remaining nuts and tighten then onto the thread of horizontal, thus securing the 3rd arch in place.

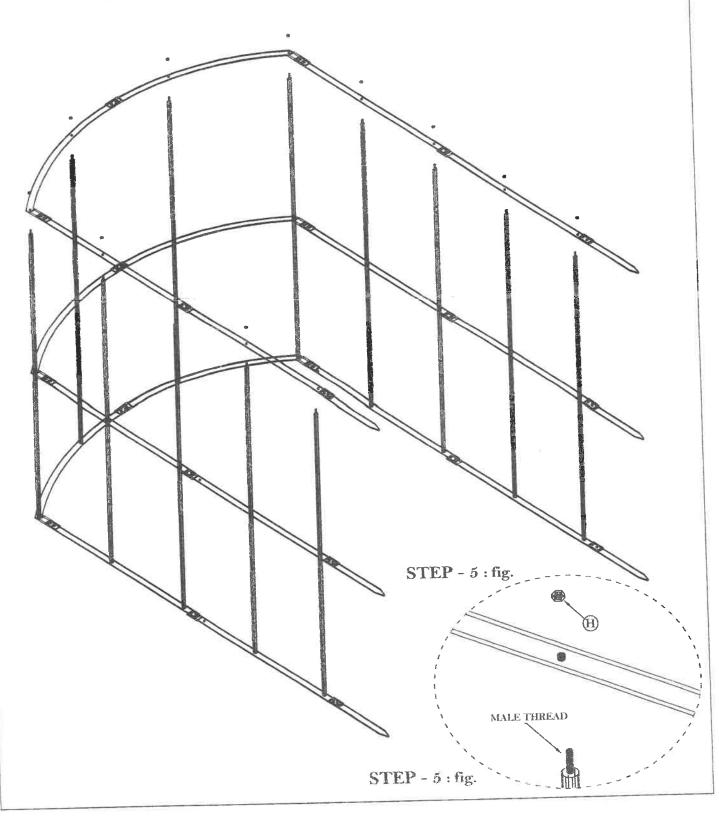



6 OF 6

PERGOLA - ASSEMBLY INSTRUCTION

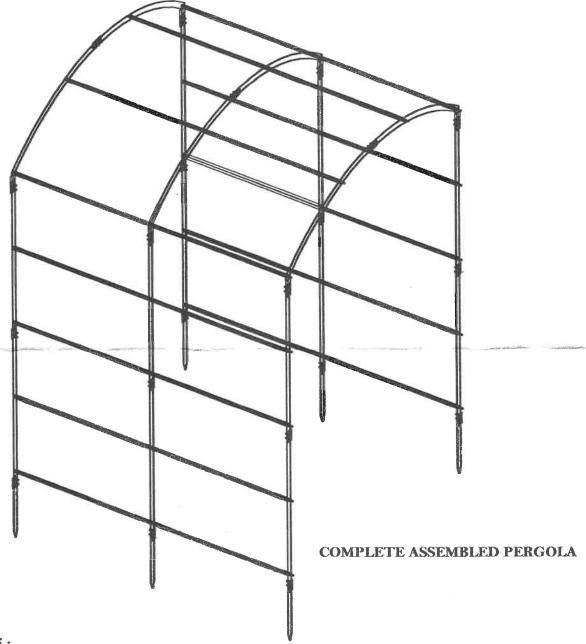

STEP - 6:

With two or more people, turn pergola upright and move to final position . Use weight of pergola to push ground anchors into the earth.

Note:

Extension kits are available to increase the length, as desired.

Contact Us
Call Toll Free (24 Hours a day)
1-800-733-4146
Customer Service (Monday-Friday, 9am-5pm EST)
1-800-733-4129